



## Verona Side Chrome

Height mm	Length mm	Henrad Code	Heat emissions	
			Watts	Btu/hr
<b>830</b>	500	712001	221	754
<b>1130</b>	500	712002	297	1013
<b>1430</b>	500	712003	371	1266
<b>1730</b>	500	712004	448	1529

Btu/hr @  $\Delta t50^{\circ}\text{C}$



For technical and installation information  
visit our website [www.henrad.co.uk/downloads](http://www.henrad.co.uk/downloads)

### Centre Tap TRV Available from stock



UIN	Henrad Description
14531310	Centre Tap TRV Straight White - 10mm
14531312	Centre Tap TRV Straight White - 1/2in
14531315	Centre Tap TRV Straight White - 15mm
14531410	Centre Tap TRV Straight Chrome - 10mm
14531412	Centre Tap TRV Straight Chrome - 1/2in
14531415	Centre Tap TRV Straight Chrome - 15mm
14531510	Centre Tap TRV Angled L White - 10mm
14531512	Centre Tap TRV Angled L White - 1/2mm
14531515	Centre Tap TRV Angled L White - 15mm
14531610	Centre Tap TRV Angled L Chrome - 10mm
14531612	Centre Tap TRV Angled L Chrome - 1/2mm
14531615	Centre Tap TRV Angled L Chrome - 15mm
14531710	Centre Tap TRV Angled R White - 10mm
14531712	Centre Tap TRV Angled R White - 1/2mm
14531715	Centre Tap TRV Angled R White - 15mm
14531810	Centre Tap TRV Angled R Chrome - 10mm
14531812	Centre Tap TRV Angled R Chrome - 1/2mm
14531815	Centre Tap TRV Angled R Chrome - 15mm

## Technical information

### Testing and Operating Pressures

Henrad Verona Side Chrome has been independently tested to ensure these radiators perform to a maximum working pressure of 4.0 bar.

### Finish

Chrome.

### Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.


### Warranty

Henrad Verona Side Chrome comes with a 5 year manufacturer's warranty.

## Henrad Verona Side Chrome

### Wall Mounting Information

All dimensions in mm.

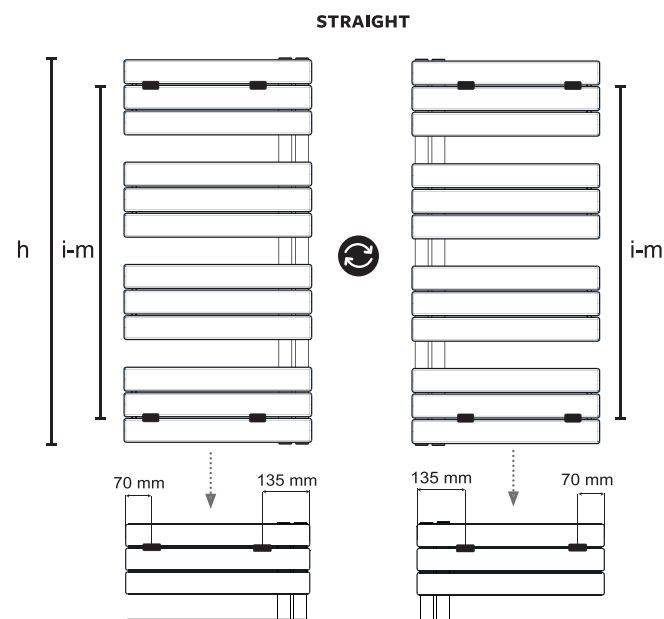

Valid for all sizes.

Height (mm)	I-M (mm)
830	675
1130	975
1430	1275
1730	1575

